

For Residential and Commercial Applications

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

Series FS-CDC-S FloodSafe® Braided Stainless Steel Dishwasher Connectors

Series FS-CDC-S FloodSafe® Braided Stainless Steel Dishwasher Connectors are designed for use in residential & commercial applications, specifically for hookups to the dishwasher water supply. They include a patented FloodSafe® shutoff device on the inlet side to protect against catastrophic water damage. There are no mechanical moving parts during normal operation and no power source is required. FloodSafe® connectors consist of PVC tubing jacketed with braided stainless steel and require no tube cutting, bending, or soldering during installation. Various end connections are available.

Features

- Available in 48", 60" and 72" (1219, 1524 and 1829mm) lengths
- NSF & IAPMO Listed
- Only economical and secure safeguard against catastrophic water damage available on the market
- U.S. Patent No. 7,111,638
- No mechanical moving parts during normal operation, ensuring years of maintenance free operation
- Does not require electricity, batteries or any other source of power
- Installs between the stop valve and the fixture/appliance with the FloodSafe® device located at the stop valve
- FloodSafe® connectors can be easily reset if water flow has been stopped

Specifications

A braided stainless steel dishwasher connector shall be installed as indicated on the plans. The connector shall have a patented FloodSafe® shutoff device on the inlet side. The connector shall be pressure rated to 125psi (8.75 bar) and be NSF & IAPMO listed. Connector shall be a Watts Regulator Company Series FS-CDC-S.

MODEL	SIZE (DN)		LENGTH		MATERIAL	WEIGHT	
	in.	mm	in.	mm		lbs	kgs
FS-CDC-S-CE	3/8 x 3/8	10 x 10	48	1219	Stainless Steel	0.66	0.30
FS-CDC-S-CE	3/8 x 3/8	10 x 10	60	1524	Stainless Steel	0.76	0.34
FS-CDC-S-CE	3/8 x 3/8	10 x 10	72	1829	Stainless Steel	0.87	0.39
FS-CDC-S-FE	1/2 x 3/8	15 x 10	48	1219	Stainless Steel	0.70	0.32
FS-CDC-S-FE	1/2 x 3/8	15 x 10	60	1524	Stainless Steel	0.81	0.37
FS-CDC-S-FE	1/2 x 3/8	15 x 10	72	1829	Stainless Steel	0.92	0.42



Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

**ISO 9001-2000
CERTIFIED**



USA: 815 Chestnut St., No. Andover, MA 01845-6098; www.watts.com

Canada: 5435 North Service Rd., Burlington, ONT. L7L 5H7; www.wattscanada.ca

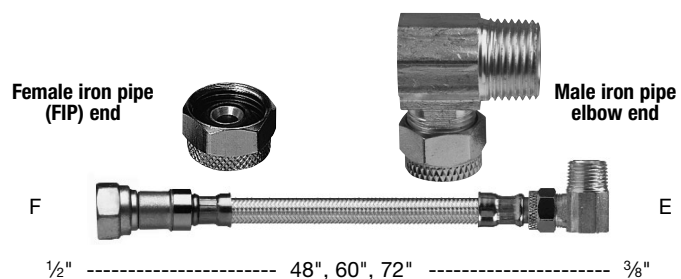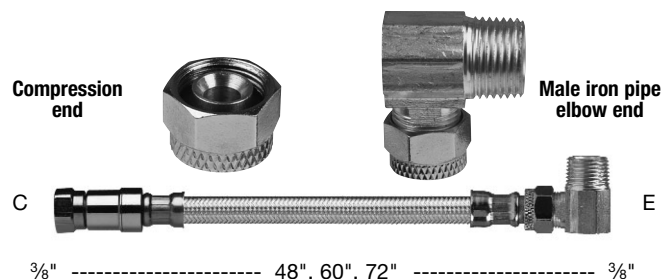

Models

FS-CDC-S-CE – Supplied with a plated, solid brass nut compression end fittings at both ends of the flexible connector and a brass male iron pipe thread elbow fitting.

FS-CDC-S-FE – Supplied with a plated, solid brass nut female iron pipe thread connector at one end of the flexible connector and a brass male iron pipe thread elbow fitting attached to compression end fitting at the other end of the flexible connector.

Pressure – Temperature

Maximum Temperature: 180°F (82°C)

Maximum Pressure: 125psi (8.75 bar)

WATTS®

Water Safety & Flow Control Products